

Rinato XL Spa Classic Sophistication.




Mirroring the distinctive personalities of our Murano and Rinato Spas, the Rinato XL is a true hybrid of our two most popular products for a stylish combination of these revolutionary pedicure spas. Like all European Touch products, the Rinato XL presents a unique grace with unrivaled design intelligence, geared to enhance your pedicure service for your clients as well as your technicians. From the smart appearance of the streamlined basin to the unmatched simplicity of our Clean Touch™ Pipe-Free technology, our Rinato XL takes ease-of-use and efficiency to the next level. With client-controlled seat recline, forward and back movement and massage settings, every client will find their ideal setting. For the ultimate pedicure experience, sound can be added to let your client drift away during their pedicure using their own portable music player. The result is the perfect experience that keeps clients coming back.


RINATO XL SPA

Chic accoutrements.


Basin Colors



Base Colors



Cushion Colors

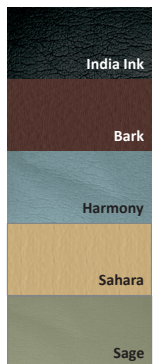

Deep, enveloping seat swivels to allow easy entry and exit for clients of all heights.

Client specifically chooses the perfect settings via remote control.

Solid cast aluminum leg supports independently adjust for pedicure and massage treatments and allow the technician to work freely with both hands.

Conveniently located control panel with improved hand sprayer is within easy reach for the technician.

Choose from one of our six standard Color Trend cushion colors, or select from our new CUSTOM COLOR OPTION which allows you to choose from an array of special cushion colors and textures at no additional cost.



Two custom sound options are available as an upgrade. Options include factory installed hard-wire with headphones or a plush pillow with speakers cleverly hidden inside.

Air Caress Relaxation System provides a calming and soothing client massage.

Clean Touch basin requires only 4.5 gallons of water per pedicure, lowering hot water bills and providing the Eco-friendly answer to pedicure spas.

The optional Power Drain Pump makes draining water quick and efficient.



We have a solution that's right for your salon or spa. Call for more information and a free consultation.




EUROPEAN TOUCH™

800.626.6912
www.europeantouch.com

PEDICURE SPA SPECIFICATIONS

Hot and cold water supply lines required (hot and cold shut offs may be installed under pedicure spa base)

Pedicure spa must be installed by a licensed electrician and a licensed plumber, conforming to all local and national electrical codes.

NOTE: Due to our policy of continuous improvements, all specifications are subject to change without notice. All dimensions and weights are approximate.

SHIPPING INFORMATION

Carton Dimensions: 65”L (165cm) x 36W (84cm) x 41”H (104cm) – includes Spa, carton, and pallet
65”L (165cm) x 36W (84cm) x 53”H (135cm) – includes Spa, carton, pallet, and accessories
Weight: 280 lbs. (119 kg) - includes spa, carton, pallet

SPA INFORMATION

Overall dimensions, seat upright and forward: 59”L (150cm) x 31.5”W (80cm) x 54”H (137cm)
Minimum area required for full chair movement: 76”L (193cm) x 46”W (117cm) x 57”H (145cm)
Empty weight (complete): 195lbs (88kg)
Water Fill Line Capacity: 4.5 U.S. gallons (17 Liters)
Whirlpool pump motor: 110V: 1/6 HP, 110V, 60Hz
220V: 1/6 HP, 220V, 50/60Hz
Seat upholstery: Polyurethane
Seat and back motors: 24V DC Linear Actuators.
Spa requires 17” (44cm) of space between pedicure spa and wall
Brushless Roller Massage motor: 12V AC, Adapter included (alternate voltages available)
Power source: 110V: 110V AC, 2.75 Amps, 60 Hz (GFCI Protected)
220V: 220V AC, 2.75 Amps, 50/60 Hz (GFCI Protected)
Construction: Steel Frame with ABS-backed acrylic shells and basin, pre-plumbed
Clean Touch™ Pipe-Free® Technology:
4 water massage channels, no closed loop circulating pipes, fully drained. System employs three part assembly that twists from the basin for easy cleaning.
Electrical switches: On/Off switch for pump. Dual hand-held, low voltage remote controls for massage motors and seat forward/back position. Hot and Cold water supply lines required.
Compliances: Tested according to CAN/CSA-E60335-1:1994, CAN/CSA-E60335-2-32:2001, UL 60335-1:2002, & UL 1647:2001
Electrostatic Limits: This unit may lose one or more functions when electrostatic contact discharge in excess of 4KV gets into accessible conductive part of the unit and can be restored by resetting the unit.
AC input power port and can be restored by resetting the unit.
This unit may lose one or more functions when subjected to fast transient voltages in excess of 0.5KV at 5 KHz repetition frequency and cannot be restored.

Limited warranty:

One (1) year on parts from date of shipment. Labor is not included. See page 3 for full warranty.

NOTE: Due to our policy of continuous improvements, all specifications are subject to change without notice. All dimensions and weights are approximate.